
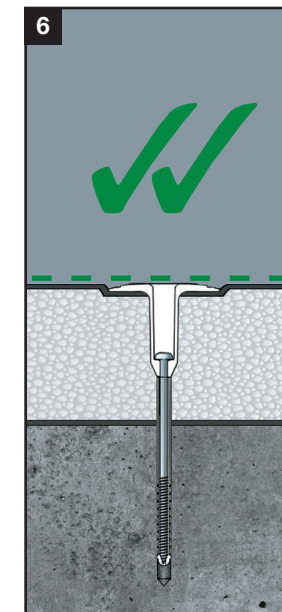
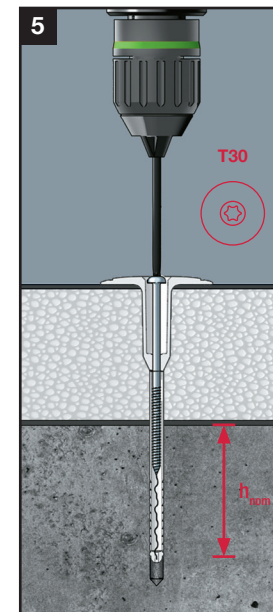
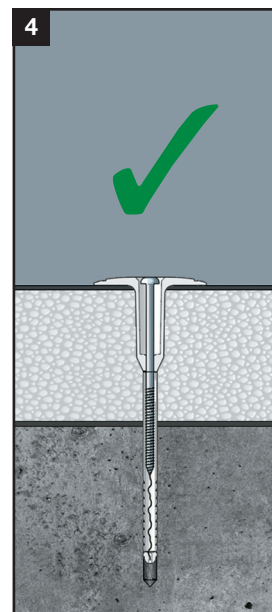
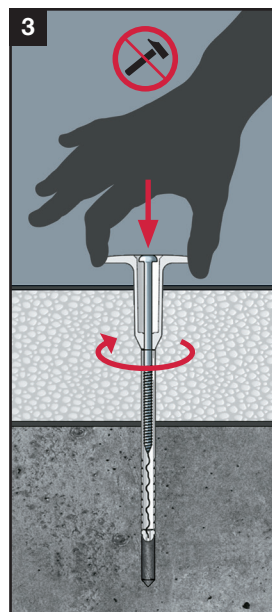
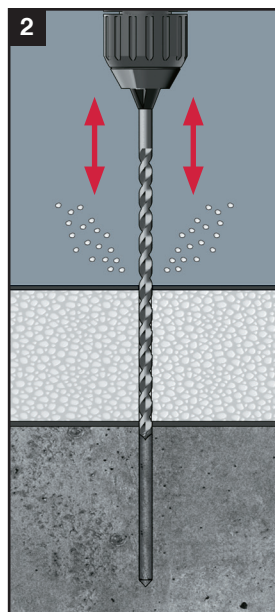


Монтаж EJOT® Flachdachdübel FDD-Plus-50

User manual EJOT® Flat Roofing Anchor FDD-Plus-50

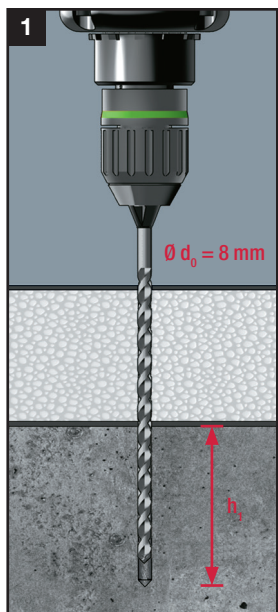

Bohrlochtiefe / Drill hole depth h_1

Beton / Concrete \geq C12/15	\geq 45 mm
Leichtbeton / Lightweight concrete \geq LC12/13	\geq 45 mm
Porenbeton / Aerated concrete \geq P 3.3	\geq 80 mm

Effektive Verankerungstiefe / Effective installation depth h_{nom}

Beton / Concrete \geq C12/15	\geq 30 mm
Leichtbeton / Lightweight concrete \geq LC12/13	\geq 30 mm
Porenbeton / Aerated concrete \geq P 3.3	\geq 65 mm