



	0756-CPD- ①	ETA- ③	ETAG 001- 1,5 Option ④	seismic category ⑤		C	R	HCR			M8	M10	M12	M16	M20	M24	M27	M30		
04	0045	04/0027	7	/	HIT-RE 500	HAS / -E (-F)	5.8				[mm]	80	90	110	125	170	210			
						HAS / -E		8.8		x		x	80	90	110	125	170	210	240	270
						HIT-V (-F)	5.8	8.8	x	x		$h_{0,min}$	40	40	48	64	80	96	108	120
						HIS-(R)N	x	x		$h_{0,max}$		160	200	240	320	400	480	540	600	
07	0206	07/0260	1	C1	HIT-RE 500-SD	HIT-V (-F)	5.8	8.8	x	x	$h_{0,min}$	40	40	48	64	80	96	108	120	
						HIS-(R)N	x	x		$h_{0,max}$	160	200	240	320	400	480	540	600		
										h_{ef}	90	110	125	170	205					
											80	90	110	125	170	210				
08	0239	08/0341	7	/	HIT-HY 110	HAS / -E (-F)	5.8				[mm]	80	90	110	125	170	210			
						HAS / -E		8.8		x		x	80	90	110	125	170	210	240	270
						HIT-V (-F)	5.8	8.8	x	x		$h_{0,min}$	60	60	70	80	90	100	110	120
						HIS-(R)N	x	x		$h_{0,max}$		160	200	240	320	400	480	540	600	
05	0122	05/0255	7	/	HVU	HAS / -E (-F)	5.8				[mm]	80	90	110	125	170	210			
						HAS / (-E)				x			80	90	110	125	170	210	240	270
						HIS-(R)N	x	x		h_{ef}		90	110	125	170	205				
												80	90	110	125	170	210			
08	0240	08/0352	1	/	HIT-HY 150 MAX	HAS / -E (-F)	5.8				[mm]	80	90	110	125	170	210			
						HAS / -E		8.8		x		x	80	90	110	125	170	210	240	270
						HIT-V (-F)	5.8	8.8	x	x		$h_{0,min}$	60	60	70	80	90	100	110	120
						HIS-(R)N	x	x		$h_{0,max}$		160	200	240	320	400	480	540	600	
11	0418	11/0354	7	/	HIT-CT 1	HIT-V (-F)	5.8	8.8	x	x	$h_{0,min}$	64	80	96	128	160	192			
										$h_{0,max}$	96	120	144	192	240	288				

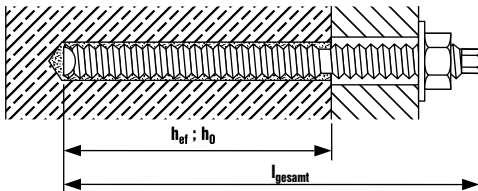

	1343-CPR-M 500-...	ETA-...	ETAG	Option	Seismic		C	R	HCR		M6	M8	M10	M12	M16	M20	M24	M27	M30	
14	2/07.14	14/0009	ETAG 001,-5	1	/	HIT-HY 100	HIT-V (-F)	5.8	8.8	x	x	$h_{0, min}$	60	60	70	80				
				7			HIS-(R)N	x	x			$h_{0, max}$	160	200	240	320				
												h_{ref}	60	60	70	80	90	100	110	120
												h_{ref}	160	200	240	320	400	480	540	600
15	8/07.14	14/0457	ETAG 001,-5	1	/	HIT-HY 170	HIT-V (-F)	5.8	8.8	x	x	$h_{ref, min}$	60	60	70	80	90	96		
				7			HIS-(R)N	x	x			$h_{ref, max}$	96	120	144	192	240	288		
												h_{ref}	90	110	125	170	205			
15	9/07.14	15/0197	ETAG 029	/	/	HIT-HY 170	HIT-V (-F)	5.8	8.8	x	x	h_{ref}	80	80	80					
15	10/07.14	11/0493	ETAG 001,-5	1	C1 (\geq M10)	HIT-HY 200-A	HIT-V (-F)	5.8	8.8	x	x	$h_{ref, min}$	60	60	70	80	90	96	108	120
							HIS-(R)N	x	x			$h_{ref, max}$	160	200	240	320	400	480	540	600
												h_{ref}	90	110	125	170	205			
15	11/07.14	12/0084	ETAG 001,-5	1	C1 (\geq M10)	HIT-HY 200-R	HIT-V (-F)	5.8	8.8	x	x	$h_{ref, min}$	60	60	70	80	90	96	108	120
							HIS-(R)N	x	x			$h_{ref, max}$	160	200	240	320	400	480	540	600
												h_{ref}	90	110	125	170	205			
14	7/07.14	13/1036	ETAG 029	/	/	HIT-HY 270	HIT-V (-F)	5.8	8.8	x	x	$h_{ref, min}$	80	50	50	50				
												$h_{ref, max}$	300	300	300	300				



Technische Universität Darmstadt,
Institut für Werkstoffe im Bauwesen

Z			C	R	HCR		M8	M10	M12	M16	M20	M24	M27	M30
21.8-1900	Hilti HIT-HY 200-A Hilti HIT-RE 500-SD	HCC-HIT-V(-F)	5.8	8.8	X	X	l_{gesamt}	mm	≥ 1000	≥ 1000	≥ 1000	≥ 1000	≥ 1000	