

# HILTI

# 100 X-EKSC 16 MX


# 274083








Made in Slovenia



7 613023 446484



<b>CE</b>
16
Hilti AG
FL-9494 Schaan
Hilti-DX-DoP-005
ETA-16/0301
EAD 330083-00-0601
0672
0672-CPR-0624
Power-actuated fastener for multiple use in concrete for non-structural applications

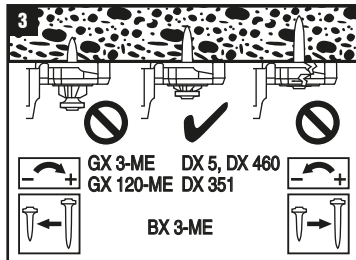

**UL** US  
**LISTED**  
POSITION DEVICE  
50PM

Temperature rating 65 °C (149 F),  
for indoor use, suitable for use in air  
handling spaces in accordance with  
Sec. 300-22(c) and (d) of the  
National Electrical Code.

2079563-04.2017