

Threaded rod G

Universal threaded rod for fixing pipes and channels




9

Applications

- For use in dry interior areas.

Properties

- Material threaded rod G (G6 - G24): DIN 976 steel 4.8, acc. to DIN EN ISO 898-1
- Material threaded pipe G (G½" - G¾"): steel S235JR (material no. 1.0037), acc. to DIN EN 10025
- Zinc plating: electro zinc-plated




G


Technical data

Item	Item no.	Length l [mm]	Thread A	Sales unit [pcs]
G M6 x 1000	020956	1,000	M6	50
G M8 x 1000	079740	1,000	M8	25
G M8 x 2000	079741	2,000	M8	25
G M10 x 1000	079744	1,000	M10	25
G M10 x 2000	079745	2,000	M10	25
G M10 x 3000	557092	3,000	M10	5
G M12 x 1000	020957	1,000	M12	20
G M12 x 2000	579746	2,000	M12	25
G M12 x 3000	064056	3,000	M12	5
G M16 x 1000	020958	1,000	M16	10
G M16 x 3000	568434	3,000	M16	5
G M20 x 1000	557295	1,000	M20	5
G M24 x 1000	557270	1,000	M24	5
G 1/2" x 2000	064093	2,000	1/2"	10
G 3/4" x 2000	077580	2,000	3/4"	5
G 1" x 2000	568435	2,000	1"	5

Loads

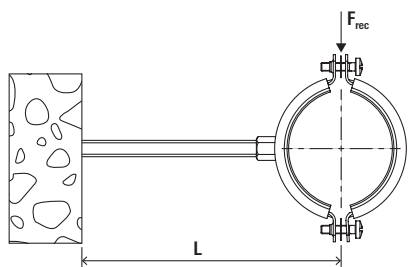

Threaded rods (4.8)

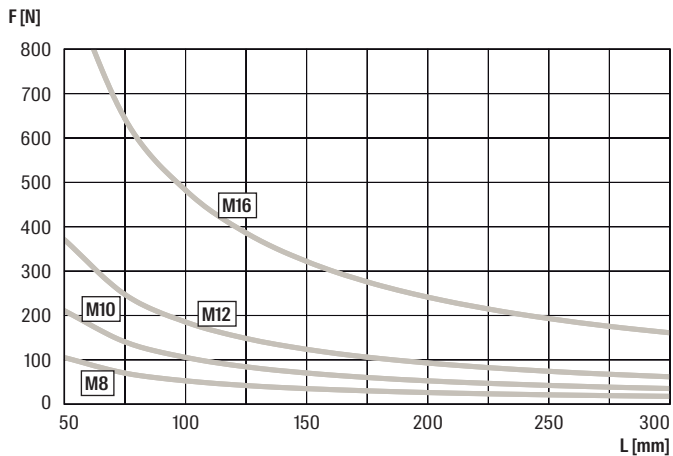

Threaded pipes

