

HILTI

100 X-EKSC 32 MX


386469





Made in Slovenia





7 613023 501947



CE
16
Hilti AG
FL-9494 Schaan
Hilti-DX-DoP-005
ETA-16/0301
EAD 330083-00-0601
0672
0672-CPR-0624
Power-actuated fastener for multiple use in concrete for non-structural applications

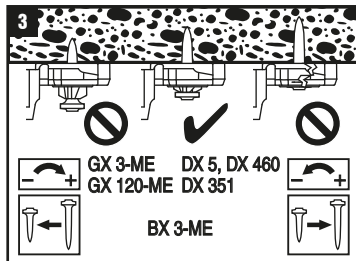

2079622-04.2017



UL US
LISTED
POSITION DEVICE
50PM

Temperature rating 65 °C (149 F), for indoor use, suitable for use in air handling spaces in accordance with Sec. 300-22(c) and (d) of the National Electrical Code.

